



Fall Protection




FALL PROTECTION



DSI SAFETY INC. KNOWN AS DYNAMIC SAFETY INTERNATIONAL IS A CANADIAN OWNED AND OPERATED COMPANY.

Dynamic Safety International is well known with its Dynamic brand of products, and is growing fast due to Dynamic's team of employees and to our multitude of innovative products such as head protection, safety eyewear, face protection, hearing protection and respiratory protection including fall protection, Hi-Viz traffic and First Aid products.

Dynamic products are proudly made to meet all the safety regulations and/or standards required in Canada, United States, Europe and Latin America. These safety products must be certified by multiple certification bodies such as CSA, ANSI, CE, NIOSH and when permitted, we are proud to apply their logo on all our products applicable to these countries, proving the high quality these have to meet and you can trust using them.

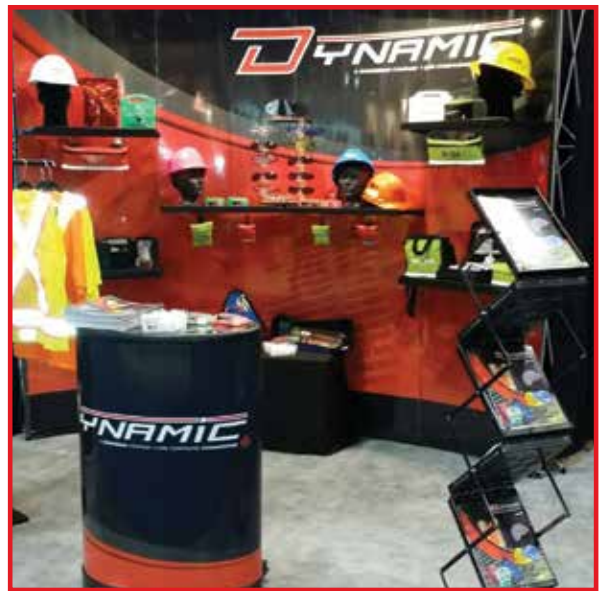

Our great team of Product Managers have over 100 years of experience and expertise in their respective areas. Whether it's for your respiratory, fall protection, Head, Eye, Hearing, Hi-Viz products and first aid products, with their knowledge and in conjunction with our Specialist, they will be able to support you during your training, risk assessment surveys in the workplace in addition to helping your safety committee select the proper safety equipment.

Our goal and objective at Dynamic Safety International is to design and produce the best PPE of the market and make sure that all employees arrive home everyday healthy and safe.



ABCs OF PERSONAL FALL ARREST SYSTEM

A

Anchorage Connectors

Products that connect the connecting device to the anchor structure.

Cable Slings	38
Pass Through Slings	38
D-Ring Anchors	39
Removable Concrete Anchors	39
Toggle Anchors	39
Drop Through Anchor	39
Swivel Anchors	39
Beam Anchors	40
Roof Anchors	41

B

Body Wear

Personal protective equipment worn by the user.

Dyna-Tower Harnesses	5
Y-Trend and V-Trend Harnesses	6
Dyna-Pro Aluminum Professional Harnesses	7
Dyna-Pro Universal & Professional Harnesses	8
Dyna-I Universal Harnesses	9
Easy Don X-Trend Aluminium Harnesses	10
Easy Don X-Trend Harnesses	11
X-Trend Harnesses	12
Hybrid Econo Harnesses	13
B-Compliant Harnesses	14
Specialized Harnesses	15
Dyna-I Coated Harnesses	16
Anti Corrosion Harnesses	17
Dyna-Viz Harnesses	17
Harnesses Combo	18
Belts	19

C

Connecting Devices

Products that connect the body wear to anchorage connectors. Critical to the system as it usually has energy absorbing technology.

Self-Retracting Lifelines / Personal Fall Limiters	20-22
Lanyards	23-33
Dyna-Pak Energy Absorber and Extended D-Ring	34
Rebar Assemblies	34
Hook & Carabiners	35
Vertical Rope Lifelines	36
Rope Grabs	37

D

Descent/Rescue and Confined Space

Product that can be used in a rescue plan to ensure rescue is done in a timely matter

Rescue & Retrieval Systems	41
Tripods & Accessories	42


HARNESS SIZING & CLASS

HARNESS APPLICATION CLASS

Harnesses are available for a variety of applications signified by the pictograms and definitions below.



Class A
Fall Arrest
CSA Group A



Class P
Work Positioning
CSA Group P



Class E
Evacuation / Retrieval
CSA Group E




Class L
Ladder Climbing
CSA Group L



Class D
Suspension & Descent
CSA Group D

HARNESS SIZING CHARTS

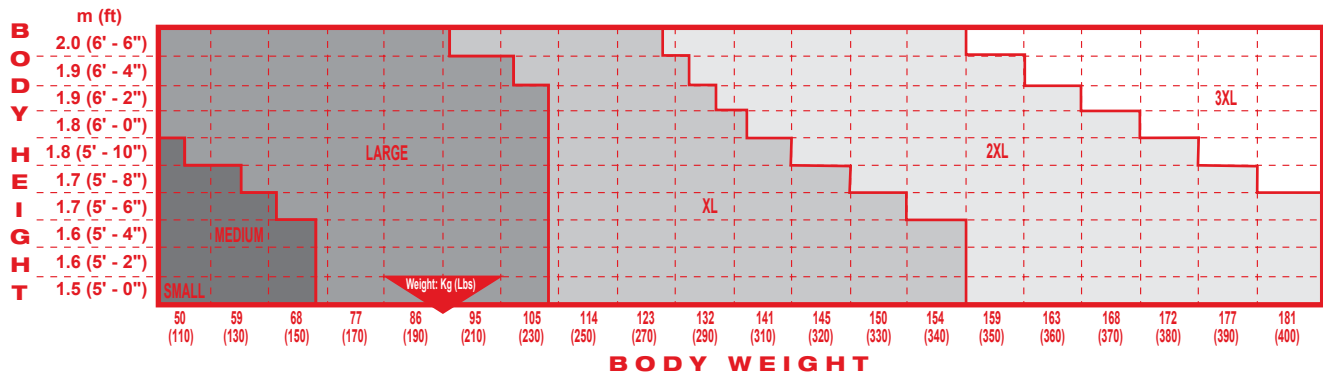

BELT SIZING CHARTS

BELT SIZE	WAIST MESUREMENT	
	CENTIMETERS	INCHES
SMALL	71 TO 91 CM	28" TO 36"
MEDIUM	81 TO 101 CM	32" TO 40"
LARGE	91 TO 111 CM	36" TO 44"
XLARGE	101 TO 122 CM	40" TO 48"
XXLARGE	111 TO 132 CM	44" TO 52"
XXXLARGE*	122 TO 142 CM	48" TO 56"

* This size is available upon request with a supplement of 15%

CONNECTION DEVICES



Quick Connect Buckle
Bayonet style



Tongue and Buckle
(Grommets)



Friction Buckle
Pass Through



Friction Buckle


Dyna-Tower Harnesses

VEST STYLE HARNESS WITH INTEGRATED SHOULDER AND LEG PAD, PERMANENT ATTACHED BELT WITH LUMBAR SUPPORT AND OPTIONAL SADDLE OR WORKSEAT. ALL ALUMINUM HARDWARE.



CERTIFIED BY CSA CANADA

Dyna-Tower harness were designed specifically for the tower industry where comfort, fit and weight are very important. The intergrated breathable comfort pad is a perfect size to maximize comfort without causing unecessary heat zones. All the hardware is aluminum removing all unecessary weight which make them lighter than traditional harnesses. The Dyna-Tower harnesses have removable saddle or work seat which provides additional comfort when working at heights for longer period of times. There are two d-rings on the front for ultimate verstility when connecting to ladder systems or rescue/rope access devices. The intergrated belt provides comfort when in work positioning but is specifically designed to ensure proper load transfer from the belt to the harness to maximize the load distribution to the body. These harnesses are certified to CSA class ADPLE. They also meet and exceed ANSI and OSHA regulations.



WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
WITH INTEGRATED BELT			
FPT04DDC	A, P, L	F, B, S (2)	ALUMINUM BAYONET
FPT04DDD	A, P, L	F, B, S (2)	TONGUE BUCKLES
FPT05DDC	A, P, L	F (2), B, S (2)	ALUMINUM BAYONET
FPT05DDD	A, P, L	F (2), B, S (2)	TONGUE BUCKLES
WITH INTEGRATED SADDLE			
FPT07DSC	A, P, L, D	F (2), B, S (2), SADDLE (2)	ALUMINUM BAYONET
FPT07DSD	A, P, L, D	F (2), B, S (2), SADDLE (2)	TONGUE BUCKLES
WITH INTEGRATED WORK SEAT			
FPT07DWC	A, P, L, D	F (2), B, S (2), WORK SEAT (2)	ALUMINUM BAYONET
FPT07DWD	A, P, L, D	F (2), B, S (2), WORK SEAT (2)	TONGUE BUCKLES

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (ajustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)



FPT05DDC

FPT07DSC

FPT07DWD


Y-Trend Harnesses

SUSPENSION HARNESS WITH INTEGRATED SHOULDER AND LEG PAD. PERMANENT ATTACHED BELT WITH LUMBAR SUPPORT. ALL ALUMINUM HARDWARE.



CERTIFIED BY CSA CANADA

Y-Trend harness were designed for rope access and rescue. The integrated breathable comfort pad is a perfect size to maximize comfort without causing unnecessary heat zones. All hardware is aluminum making this harness one of the lightest on the market. The bottom of the Y-Trend harness has been specifically designed so that the user can suspend in the harness naturally for long period of times while staying comfortable. The top of the Y-Trend harness has a unique configuration which makes the harness intuitive to don and eliminating the need to step into the harness and pull over like traditional harness on the market. These harnesses are CSA certified class ADPLE. They also meet and exceed ANSI and OSHA regulations.



SUSPENSION, WORK POSITIONING & CONFINED SPACE

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPY05DFF	A, P, L, D	F, B, S	ALUMINUM BAYONET
FPY05DFH	A, P, L, D	F, B, S	TONGUE BUCKLES



FPY05DFH



FPW06D


V-Trend Harnesses

SUSPENSION HARNESS WITH INTEGRATED SHOULDER AND LEG PAD. PERMANENT ATTACHED BELT WITH LUMBAR SUPPORT. ALL ALUMINUM HARDWARE.



CERTIFIED BY CSA CANADA

V-Trend harness is designed for rope access and rescue. The integrated breathable comfort pad is a perfect size to maximize comfort without causing unnecessary heat zones. All hardware is aluminum making this harness one of the lightest on the market. The bottom of the V-trend harness has been specifically designed so that the user can suspend in the harness naturally for long period of times while staying comfortable. The top of the V-Trend harness has a unique configuration which makes the harness intuitive to don and eliminating the need to step into the harness and pull over like traditional harness on the market. These harnesses are CSA certified class ADPLE. They also meet and exceed ANSI and OSHA regulations.



SUSPENSION, WORK POSITIONING & CONFINED SPACE

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPW06D	A, P, L, D	F, B, S, BELT	ALUMINUM BAYONET
FPW06DG	A, P, L, D	F, B, S, BELT	TONGUE BUCKLES

CLASS (Legend)

A - Fall Arrest • **P** - Work Positioning
D - Suspension & descent • **L** - Ladder Climbing
E - Confined Spaces

Metalic D-ring

F - Front • **B** - Back (adjustable) • **S** - Sides or hips
E - Shoulders • **L** - Chest strap buckle • **X** - Extension (d-ring)

Dyna-Pro Aluminum Professional Harnesses

VEST STYLE HARNESS WITH ALL ALUMINUM HARDWARE.
 INTEGRATED PAD ON SHOULDERS & LEG STRAPS.
 5 POINT ADJUSTMENT.



CERTIFIED BY CSA CANADA

Dynamic Dyna-Pro Aluminum harness is designed for comfort eliminating all unnecessary weight and bulkiness in both padding and hardware. With all the hardware made out of aluminum, the overall weight of the harness is reduced by 25% and provides ultimate corrosion resistance making this harness ideal for those working in highly corrosive environments. The Dynamic back pad focuses on comfort while relieving pressure point at all the right places such as your shoulders and the back of the legs. The minimalistic pad eliminates heat zones, weight and reduces the overall bulkiness of the harness making this harness one of the most comfortable harness you will wear. These harnesses are CSA certified class ADPLE. They also meet and exceed ANSI and OSHA regulations.



FPX1003DG



FPX1004SD


FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPX1001D	A	B	ALUMINUM BAYONET
FPX1001ED	A	B, X	ALUMINUM BAYONET
FPX1001DG	A	B	TONGUE BUCKLES
FPX1001EDG	A	B, X	TONGUE BUCKLES




WORK POSITIONING HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPX1003D	A, P	B, S	BAYONET
FPX1003DG	A, P	B, S	TONGUE BUCKLES



WORK POSITIONING, CONFINED SPACES & LADDER CLIMBING HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPX1002D	A, D, L	F, B	ALUMINUM BAYONET
FPX1004D	A, D, P, L	F, B, S	ALUMINUM BAYONET
FPX1004DG	A, D, P, L	F, B, S	TONGUE BUCKLES
FPX1004SD	A, D, E, L	F, B, E	ALUMINUM BAYONET
FPX1004SDG	A, D, E, L	F, B, E	TONGUE AND BUCKLES



CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
 X - Extension (d-ring)

FALL PROTECTION



Dyna-Pro Universal & Professional Harnesses

VEST STYLE HARNESS WITH INTEGRATED CUSHION ON BACK, SHOULDERS & LEG STRAPS AND 5 POINT ADJUSTMENT



CERTIFIED BY CSA CANADA

The "DYNA-PRO" line of harnesses were designed for the ultimate in ease of harness donning, with light weight breathable padding only where it is required. The "DYNA-PRO" has minimal body contact for a superior fit and comfort. Most presently available padded harnesses have padding in areas that do not add to the users comfort, in fact they actually create unnecessary hot zones. When wearing this harness the user forgets that they are wearing it even if they wear it all day long. The "DYNA-PRO" harness is the lightest in its category. It offers all the necessary cushion padding needed for maximum comfort and in no case does the padding interfere with the mobility necessary to do the job.

The harnesses also come with bayonet style connectors which make it easy to put on and off. Available in sizes Regular and Extra Large. These harnesses meet and exceed ANSI and OSHA regulations and is CSA Certified.



FP1003D



FP1004DG



FP1001ED



FP550/1

CLASS (Legend)

A - Fall Arrest • **P** - Work Positioning
D - Suspension & descent • **L** - Ladder Climbing
E - Confined Spaces


Metalic D-ring

F - Front • **B** - Back (adjustable) • **S** - Sides or hips
E - Shoulders • **L** - Chest strap buckle • **X** - Extension (d-ring)



FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP1001D	A	B	BAYONET
FP1001ED	A	B, X	BAYONET
FP1001DG	A	B	TONGUE BUCKLES
FP1001EDG	A	B, X	TONGUE BUCKLES




WORK POSITIONING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP1003D	A, P	B, S	BAYONET
FP1003DG	A, P	B, S	TONGUE BUCKLES

WORK POSITIONING, CONFINED SPACE & LADDER CLIMBING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP1002D	A, D, L	F, B	BAYONET
FP1004D	A, D, P, L	F, B, S	BAYONET
FP1004DG	A, D, P, L	F, B, S	TONGUE BUCKLES
FP1004SD	A, D, E, L	F, B, E	BAYONET
FP1004SDG	A, D, E, L	F, B, E	TONGUE BUCKLE



BACK SUPPORT KIT

PART NO.	DESCRIPTION	SIZE
FP550/1	DELUXE "ADD ON" LUMBAR SUPPORT FOR BELTS WITH CUSHION, COLOR RED AND BLACK. COMES WITH A TOOL BELT MODEL FP5000D. THIS KIT CAN BE ADDED TO ALL HARNESS OF FP1000, FP2000 AND FP2500 SERIES.	S/M OR L/XL

Dyna-I Universal Harnesses

VEST STYLE WITH 5 POINT ADJUSTMENT



CERTIFIED BY CSA CANADA


The vest style harnesses from DYNAMIC are made to offer comfort and ease of use. The shoulder straps and the chest strap are totally adjustable and will give you the possibility of positioning them in order to optimize your comfort. The polyester webbing gives you maximum protection against UV Rays and high resistance to most chemicals. DYNAMIC offers you a combination of leg strap connectors, D-Rings and others connectors to answer all your needs. All DYNAMIC harnesses offer a sub-pelvic strap with a sewn pattern that gives you maximum comfort. You will not feel the sewn pattern at all and you will feel like you are sitting on a cloud.

All harnesses are available in sizes Regular and Extra-Large. They also meet and exceeds the ANSI and OSHA regulations and is CSA Certified.




FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2001D	A	B	FRICTION
FP2001ED	A	B, X	FRICTION
FP2001BD*	A	B	BAYONET
FP2001BED*	A	B, X	BAYONET
FP2001DG	A	B	TONGUE BUCKLES
FP2001EDG	A	B, X	TONGUE BUCKLES
FP2001BDG*	A	B	TONGUE BUCKLES
FP2001BEDG*	A	B, X	TONGUE BUCKLES



WORK POSITIONING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2003D	A, P	B, S	FRICTION
FP2003ED	A, P	B, X, S	FRICTION
FP2003BD*	A, P	B, S	BAYONET
FP2003BED*	A, P	B, X, S	BAYONET
FP2003DG	A, P	B, S	TONGUE BUCKLES
FP2003EDG	A, P	B, X, S	TONGUE BUCKLES
FP2003BDG*	A, P	B, S	TONGUE BUCKLES
FP2003BEDG*	A, P	B, X, S	TONGUE BUCKLES



WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2002BD	A, L	B, F	BAYONET
FP2002BDG*	A, L	B, F	TONGUE BUCKLES
FP2003SD	A, E	B, E	FRICTION
FP2003SDG*	A, E	B, E	TONGUE BUCKLES
FP2003BSD*	A, E	B, E	BAYONET
FP2003BESD*	A, E	B, E	BAYONET
FP2003BSDG*	A, E	B, E	TONGUE BUCKLES
FP2004BD*	A, D, L, P	F, B, S	BAYONET
FP2004BDG*	A, D, L, P	F, B, S	TONGUE BUCKLES
FP2004SBDG*	A, D, L, E	F, B, S	TONGUE BUCKLES
FP2005D	A, P, E	B, S, E	FRICTION
FP2005DG	A, P, E	B, S, E	TONGUE BUCKLES
FP2005BD*	A, P, E	B, S, E	BAYONET
FP2005BDG*	A, P, E	B, S, E	TONGUE BUCKLES
FP2006BD	A, P, E, L	B, S, E, F	BAYONET



FP2001BED

FP2003DG

FP2005BD

CLASS (Legend)

A - Fall Arrest • **P** - Work Positioning
D - Suspension & descent • **L** - Ladder Climbing
E - Confined Spaces

Metalic D-ring

F - Front • **B** - Back (adjustable) • **S** - Sides or hips
E - Shoulders • **L** - Chest strap buckle • **X** - Extension (d-ring)

* Bayonet style connector on adjustable chest strap

Easy Don X-Trend Aluminium Harnesses

EASY TO DON X-TREND HARNESS WITH INTERGRATED SHOULDER AND LEG PADS. 4 POINTS OF ADJUSTMENT. ALL ALUMINUM HARDWARE.



CERTIFIED BY CSA CANADA

Dynamic Easy Don X-Trend Aluminum harness is designed for comfort eliminating all unnecessary weight and bulkiness in both padding and hardware. The harness has been optimized to ensure more intuitive donning allowing the customer to adjust and put on the harness with ease. With all the hardware made out of aluminum, the overall weight of the harness is reduced by 25% and provides ultimate corrosion resistance making this harness ideal for those working in highly corrosive environments. The Dynamic back pad focuses on comfort while relieving pressure point at all the right places such as your shoulders and the back of the legs. The minimalistic pad eliminates heat zones, weight and reduces the overall bulkiness of the harness making this harness one of the most comfortable harness you will wear. These harnesses meet and exceeds the ANSI and OSHA regulations and is CSA certified.



FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPV01D	A	B	ALUMINUM BAYONET
FPV01DG	A	B	TONGUE BUCKLES

FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPV02D	A, D, L	F, B	ALUMINUM BAYONET
FPV02DG	A, D, L	F, B	TONGUE BUCKLES

WORK POSITIONING & CONFINED SPACES HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPV04D	A, D, L, P	F, B, S	ALUMINUM BAYONET
FPV04DG	A, D, L, P	F, B, S	TONGUE BUCKLES
FPV04SD	A, D, L, P	F, B, E	ALUMINUM BAYONET
FPV04SDG	A, D, L, P	F, B, E	TONGUE BUCKLES
FPV06D	A, D, E, L, P	F, B, S, E	ALUMINUM BAYONET
FPV06DG	A, D, E, L, P	F, B, S, E	TONGUE BUCKLES

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)



FPV02D



FPV04DG

Easy Don X-Trend Harnesses

EASY TO DON X-TREND HARNESS WITH INTEGRATED SHOULDER AND LEG PADS. 4 POINTS OF ADJUSTMENT.



CERTIFIED BY CSA CANADA

Dynamic Easy Don X-Trend harness is designed for comfort and ease of donning. The harness has been optimized to ensure more intuitive donning allowing the customer to adjust and put on the harness with ease. The Dynamic back pad focuses on comfort while relieving pressure point at all the right places such as your shoulders and the back of the legs. The minimalistic pad eliminates heat zones, weight and reduces the overall bulkiness of the harness making this harness one of the most comfortable harness you will wear. These harnesses meet and exceeds the ANSI and OSHA regulations and is CSA certified.



FPU02D



FPU04DG

FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPU01D	A	B	BAYONET
FPU01DG	A	B	TONGUE BUCKLES




FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPU02D	A, D, L	F, B	BAYONET
FPU02DG	A, D, L	F, B	TONGUE BUCKLES



WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPU04D	A, D, L, P	F, B, S	BAYONET
FPU04DG	A, D, L, P	F, B, S	TONGUE BUCKLES
FPU04SD	A, D, L, P	F, B, S	BAYONET
FPU04SDG	A, D, L, P	F, B, S	TONGUE BUCKLES
FPU06D	A, D, E, L, P	F, B, S, E	BAYONET
FPU06DG	A, D, E, L, P	F, B, S, E	TONGUE BUCKLES



CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

X-Trend Harnesses

TRADITIONAL X-TREND HARNESS WITH 4 POINTS OF ADJUSTMENT.



CERTIFIED BY CSA CANADA

Light and easy to put on "X-TREND" harness is available in two configurations. These harnesses offer the user easy adjustment, since it does not have a chest strap. The "X-TREND" harness is made out of polyester webbing, it also has a sub-pelvic strap that distributes the forces in case of a fall. Available in sizes Regular and Extra Large. These harnesses meet and exceeds the ANSI and OSHA regulations and is CSA certified.




FP3002D



FP3006D




FP3004D



FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP3001DG	A	B	TONGUE BUCKLE
FP3002D	A, D, L	F, B	FRICTION
FP3002DG	A, D, L	F, B	TONGUE BUCKLE



WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP3004D	A, P, D, L	F, B, S	FRICTION
FP3004SD	A, D, L, E	F, B, E	FRICTION
FP3006DG	A, D, E, L, P	F, B, S, E	TONGUE BUCKLE
FP3006D	A, D, E, L, P	F, B, S, E	FRICTION
FP3004DG	A, D, L, P	F, B, S	TONGUE BUCKLE

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (ajustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

Hybrid Econo Harnesses

BASIC, ECONOMICAL AND FULLY ADJUSTABLE HARNESSES WITH 5 POINT ADJUSTMENT



CERTIFIED BY CSA CANADA

This product is the answer to a demand for a basic harness adjustable at the torso. While being called a basic harness, it offers the user everything a regular mid range harness has to offer at a budget price. Available in sizes Regular and Extra Large. These harness meet and exceeds the ANSI and OSHA regulations and is CSA certified.



FP2501D



FP2503DG



FP2505D


FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2501D	A	B	FRICTION
FP2501ED	A	B, X	FRICTION
FP2501DG	A	B	TONGUE BUCKLES
FP2501EDG	A	B, X	TONGUE BUCKLES




WORK POSITIONING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2503D	A, P	B, S	FRICTION
FP2503ED	A, P	B, S, X	FRICTION
FP2503DG	A, P	B, S	TONGUE BUCKLES
FP2503EDG	A, P	B, S, X	TONGUE BUCKLES



WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP2505D	A, P, E	B, S, E	FRICTION
FP2505DG	A, P, E	B, S, E	TONGUE BUCKLES



CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

B-Compliant Harnesses

BASIC ECONOMICAL HARNESS 3 POINT ADJUSTMENT




CERTIFIED BY CSA CANADA

This design configuration of harness gives the occasional user a quality product that offers protection as all other harnesses but at an economical price. It is made with high quality polyester webbing with adjustable leg straps. The harness offers maximum comfort, resistance to UV rays and most chemicals. All of it at an economical price more than reasonable. Available in sizes Regular and Extra Large. These harnesses meet and exceeds the ANSI and OSHA regulations and is CSA certified.




FALL ARREST HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP4001D	A	B	FRICTION
FP4001DG	A	B	TONGUE BUCKLES
FP4001ED	A	B, X	FRICTION




WORK POSITIONING HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP4003DG	A, P	B, S	TONGUE BUCKLES
FP4003D	A, P	B, S	FRICTION



FALL ARREST HARNESSSES & CONFINED SPACES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP4003SD	A, E	B, E	FRICTION
FP4003SDG	A, E	B, E	TONGUE BUCKLES



WORK POSITIONING & CONFINED SPACES HARNESSSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP4004D	A, P, L	B, S, F	FRICTION
FP4004DG	A, P, L	B, S, F	TONGUE BUCKLES
FP4005D	A, P, E	B, S, E	FRICTION
FP4005DG	A, P, E	B, S, E	TONGUE BUCKLES

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)



FP4001D



FP4003DG



FP4003SD



FP4005DG

Specialized Harnesses

HARNESSES FOR WELDERS, ELECTRICIAN
AND FOR CONFINED SPACES



CERTIFIED BY CSA CANADA

The Dyna-1FR Welders harnesses is made of Kevlar® webbing which offers the maximum protection against cuts, abrasion and high heat resistance caused by sparks and flames while giving you maximum protection in case of a fall.

The Dyna1FR Electrician harness is made out of Kevlar® and offers maximum protection against cuts, abrasions and high heat due to electrical sparks or flashes. The metal components are all coated which makes the harness completely dielectric.

Available in sizes Regular and Extra Large. These harnesses meet and exceed the AANSI and OSHA regulations and ASTM F887 Arc Flash and is CSA Certified.



FPK2001BD



FPK2003BD




FPE2003SD

FALL ARREST HARNESSES




PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
HARNESS FOR WELDER'S "DYNA-1FR"			
FPK2001BD	A	B	BAYONET
HARNESS FOR ELECTRICIAN "DYNA-1FR"			
FPE2001D	A	B	FRICTION

WORK POSITIONING HARNESSES



PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
HARNESS FOR WELDER'S "DYNA-1FR"			
FPK2003BD	A, P	B, S	BAYONET
HARNESS FOR ELECTRICIAN "DYNA-1FR"			
FPE2003D	A, P	B, S	FRICTION

WORK POSITIONING & CONFINED SPACES & LADDER CLIMBING HARNESSES



PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
HARNESS FOR WELDER'S "DYNA-1FR"			
FPK2002BD	A, L	B, F	BAYONET
FPK2005BD	A, P, E	B, S, E	BAYONET
FPK2005BDG	A, P, E	B, S, E	TONGUE BUCKLES
FPK2006BD	A, P, E, L	B, F, S, E	BAYONET
HARNESS FOR ELECTRICIAN "DYNA-1FR"			
FPE2003SD	A, E	B, E	FRICTION
FPE2005D	A, P, E	B, S, E	FRICTION

LEATHER COVER

PART NO.	DESCRIPTION
FPLANCOVER	LEATHER COVER WITH DOME SNAPS TO PROTECT THE ENERGY ABSORBER

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

Dyna-I Coated Harnesses

VEST STYLE WITH 5 POINT ADJUSTMENT AND TPU COATED WEBBING FOR EXTRA DURABILITY.



CERTIFIED BY CSA CANADA

Dyna-I coated harness is protected by a TPU coating that provides resistance to abrasion, weld splatter, chemicals, paint, grease and dirt. The harness can be wiped clean with water making it easier to inspect and prolonging the life of the harness while reducing the frequency of replacement. Ideal harness for dirty environments and clean environments as well. These harness meet and exceeds the ANSI and OSHA regulations and is CSA certified.



FPC2001BD



FPC2003BDG



FPUPAD


FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPC2001BD	A	B	BAYONET
FPC2001BDG	A	B	TONGUE BUCKLES



WORK POSITIONING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPC2003BD	A, P	B, S	BAYONET
FPC2003BDG	A, P	B, S	TONGUE BUCKLES



WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPC2005BD	A, P, E	B, S, E	BAYONET
FPC2005BDG	A, P, E	B, S, E	TONGUE BUCKLES



SHOULDER AND LEG PAD

PART NO.	DESCRIPTION
FPUPAD	OPTIONAL SHOULDER / LEG PADDING WITH VELCRO MAKING IT EASY TO ADD TO THE HARNESS - SOLD BY PAIR

CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (ajustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

Anti Corrosion Harnesses

BASIC, ECONOMICAL AND FULLY ADJUSTABLE HARNESSES WITH PVC COATED HARDWARE



CERTIFIED BY CSA CANADA

The Dynamic anti corrosion harness is design with all PVC coated hardware that will provide ultimate protection for highly corrosive environments. These harness meet and exceeds the ANSI and OSHA regulations and is CSA certified.



FPD2501D

FPD2505D


FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPD2501D	A	B	FRICTION




WORK POSITIONING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPD2503D	A, P	B, S	FRICTION
FPD2503SD	A, E	B, E	FRICTION



WORK POSITIONING & CONFINED SPACES HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPD2505D	A, P, E	B, S, E	FRICTION



Dyna-Viz Harnesses

REFLECTIVE WEBBING 5-POINT ADJUSTMENT HARNESS

MADE FROM CSA CERTIFIED COMPONENTS

The Dynamic "DYNA-VIZ" harness is designed with an orange webbing with reflective striping down the center to provide high visibility in low light.



FP25R1D

FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FP25R1D	A	B	FRICTION
FP25R3D	A, P	B, S	FRICTION
FP25R5D	A, P, E	B, S, E	FRICTION



CLASS (Legend)

A - Fall Arrest • P - Work Positioning • D - Suspension & descent • L - Ladder Climbing • E - Confined Spaces

Metalic D-ring

F - Front • B - Back (adjustable) • S - Sides or hips • E - Shoulders • L - Chest strap buckle
X - Extension (d-ring)

Harnesses Combo

WITH BELT AND LUMBAR SUPPORT

MADE FROM CSA COMPONENTS

Harness with back lumbar support provides the user with ultimate comfort and support for the lower back. The belt can also be utilized as a tool belt to ensure the weight is properly distributed to the body. Other combination of harnesses and belt can be made upon request.



FPM101D



FPM2G3D



FPM253D


FALL ARREST HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPM101D	A, P, E	B	BAYONET
FPM201D	A, P, E	B	BAYONET
FPM251D	A, P, E	B	FRICTION



WORK POSITIONING HARNESSES

PART NO.	CLASS	D-RING	LEG STRAP CONNECTORS
FPM103D	A, P	B, S	BAYONET
FPM203D	A, P	B, S	BAYONET
FPM253D	A, P	B, S	FRICTION
FPM1G1D	A	B	TONGUE BUCKLES
FPM12G1D	A	B	TONGUE BUCKLES
FPM5G1D	A	B	TONGUE BUCKLES
FPM1G3D	A, P	B, S	TONGUE BUCKLES
FPM2G3D	A, P	B, S	TONGUE BUCKLES
FPM5G3D	A, P	B, S	TONGUE BUCKLES



CLASS (Legend)

A - Fall Arrest • **P** - Work Positioning • **D** - Suspension & descent • **L** - Ladder Climbing • **E** - Confined Spaces

Metalic D-ring

F - Front • **B** - Back (adjustable) • **S** - Sides or hips • **E** - Shoulders • **L** - Chest strap buckle
X - Extension (d-ring)

Industrial Body Belts



CERTIFIED BY CSA CANADA



FP5000D



FP5001D



FP5002D



FP51001D



FP51001ED



FP52001D



FP53001D



FP500



FP550

Made of polyester webbing 1 3/4" (45cm) they are light and comfortable. Ideal for travel restraint and for certain work positioning functions. Our belts meets and exceeds ANSI, OSHA regulations and are CSA certified.

Important: Do not use if there is a potential danger for falls.

Our industrial belts are available in 4 sizes : Small, Medium, Large and X-Large (Extra-Small and XX-large can be made on request). See sizing references on page 3 of this catalogue.

PART NO.	DESCRIPTION	D-RING(S)
FP5000D	TOOL BELT	0
FP5001D	TRAVEL RESTRAINT BELT	1
FP5002D	WORK POSITIONING BELT	2

Miner's Belt



CERTIFIED BY CSA CANADA

Our miner's belts are made to be tough, comfortable and user friendly. They are made out of 2" (50cm) strong polyester webbing highly resistant to UV rays and most chemicals.

The battery straps and rescue straps are made of extra strong belting material highly resistant to abrasion and humidity.

Important: Do not use if there is a potential danger for falls.

Our miner's belts are available in 4 sizes Small, Medium, Large and X-Large (Extra-small and XX-large can be made on request).

PART NO.	DESCRIPTION	D-RING(S)
FP51001D*	MADE OF TIGHT WEAVE POLYESTER 2" (50CM) WEBBING WITH (1) BATTERY STRAP REINFORCED AND REMOVABLE	1
FP51001ED*	MADE OF TIGHT WEAVE POLYESTER 2" (50CM) WEBBING (1) REMOVABLE LAMP BATTERY STRAP WITH REINFORCEMENT UNDER STRAP AREA AND (1) EXTENDED D RING	1
FP52001D*	MADE OF TIGHT WEAVE POLYESTER 2" (50CM) WEBBING WITH (1) BATTERY STRAP REINFORCED AND REMOVABLE PLUS (1) FIXED RESCUE STRAP	1
FP53001D*	MINE SAFETY RESCUE BELT NO BATTERY STRAPS	1

* Available in size from 28" to 56". Made on orders with 15 days delivery and surcharge of 10%.

LUMBAR SUPPORT FOR INDUSTRIAL & MINER'S BELTS

PART NO.	DESCRIPTION
FP500	LUMBAR SUPPORT FOR BELT - BLACK COLOR
FP550	DELUXE LUMBAR SUPPORT WITH PADDING COLOR: RED OUTSIDE AND BLACK INSIDE

Personal Self-Retracting Devices (SRD)



CERTIFIED BY CSA CANADA

Our personal self retracting devices are made with 1" Dyneema webbing and the device housing can be connected to the harness or to the anchor. These unit are available in both single and double leg units. All of them meet and exceed ANSI, OSHA and is CSA certified as a fall Arrest type 1. RATED FOR 310LBS WEIGHT CAPACITY.



FP1-102W

FP1-102DW



FP2-203W

FP2-206W

SINGLE LEG SELF-RETRACTING LIFELINE TYPE 1

PART NO.	LANYARD MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP1-102W	DYNEEMA	TRIPLE ACTION CARABINER	SNAP HOOK	7 FT (2.15 M)
FP1-102WA	DYNEEMA	TRIPLE ACTION CARABINER	REBAR HOOK	7 FT (2.15 M)
FP1-102WB	DYNEEMA	TRIPLE ACTION CARABINER	SCAFFOLD HOOK	7 FT (2.15 M)
FP1-102WC	DYNEEMA	TRIPLE ACTION CARABINER	ALUM SCAFFOLD HOOK	7 FT (2.15 M)

DOUBLE LEG SELF-RETRACTING LIFELINE TYPE 1

PART NO.	LANYARD MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP1-102DW	DYNEEMA	TRIPLE ACTION CARABINER	SNAP HOOK (2)	7 FT (2.15 M)
FP1-102DWA	DYNEEMA	TRIPLE ACTION CARABINER	REBAR HOOK (2)	7 FT (2.15 M)
FP1-102DWB	DYNEEMA	TRIPLE ACTION CARABINER	SCAFFOLD HOOK (2)	7 FT (2.15 M)
FP1-102DWC	DYNEEMA	TRIPLE ACTION CARABINER	ALUM SCAFFOLD HOOK (2)	7 FT (2.15 M)

SINGLE LEG SELF-RETRACTING LIFELINE TYPE 2

PART NO.	LANYARD MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP2-203W	DYNEEMA	SNAP HOOK	TRIPLE ACTION CARABINER	11 FT (3.4 M)
FP2-203WA	DYNEEMA	SNAP HOOK	REBAR HOOK	11 FT (3.4 M)
FP2-203WB	DYNEEMA	SNAP HOOK	SCAFFOLD HOOK	11 FT (3.4 M)
FP2-203WC	DYNEEMA	SNAP HOOK	ALUM SCAFFOLD HOOK	11 FT (3.4 M)
F2-206W	DYNEEMA	SNAP HOOK	TRIPLE ACTION CARABINER	20 FT (6.1 M)
FP2-206WA	DYNEEMA	SNAP HOOK	REBAR HOOK	20 FT (6.1 M)
FP2-206WB	DYNEEMA	SNAP HOOK	SCAFFOLD HOOK	20 FT (6.1 M)
FP2-206WC	DYNEEMA	SNAP HOOK	ALUM SCAFFOLD HOOK	20 FT (6.1 M)
FP2AA06C	GALVANIZED	SNAP HOOK	TRIPLE ACTION CARABINEER	20 FT (6.1M)



Web Self-Retracting Devices (WSRD)

CERTIFIED BY CSA CANADA

Our seat belt type web retracting lanyard (WSRD) are made with 2 in (50mm) wide polyester webbing. All of them meet and exceed ANSI, OSHA and is CSA certified as a fall Arrest type 1. RATED FOR 310LBS WEIGHT CAPACITY.

PART NO.	LANYARD MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP0101W	POLYESTER	D-SHAPED CARABINER	D-SHAPED CARABINER	9-1/2 FT (2.95M)
FP0102W	POLYESTER	SNAP HOOK	D-SHAPED CARABINER	8 FT (2.4 M)
FP0103W	POLYESTER	SWIVEL SNAP HOOK	D-SHAPED CARABINER	8 FT (2.4 M)



Self-Retracting Devices (SRD)

CERTIFIED BY CSA CANADA

All Aluminum SRL with composite casing. They all come with 3/16" (5 mm) galvanized wire cable. Certified to CSA and meet and exceed ANSI and OSHA. RATED FOR 310LBS WEIGHT CAPACITY AND APPROVED FOR LEADING EDGE APPLICATIONS.

SELF-RETRACTING LIFELINES TYPE 2

PART NO.	LIFELINE MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	WEIGHT	LENGTH
FP2AA10C	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	14.5 LB (6.5 KG)	32.5 FT (10 M)
FP2AA15C	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	19 LB (8.6 KG)	50 FT (15 M)
FP2AA33C	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	28.7 LB (13 KG)	100 FT (33 M)

SELF-RETRACTING LIFELINES WITH INTEGRATED RETRIEVAL WINCH TYPE 3

PART NO.	LIFELINE MATERIAL	RETRIEVAL WINCH	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	WEIGHT	LENGTH
FP3AA15CR	GALVANIZED CABLE	3 WAY	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	18 LBS (8 KG)	50 FT (15 M)
FP3AA33CR	GALVANIZED CABLE	3 WAY	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	32.6 LB (14.8 KG)	100 FT (33 M)

Self-Retracting Devices (SRD)



CERTIFIED BY CSA CANADA

Our self-retracting devices (SRD) are completely made of steel providing the durability to stand up to harsh conditions. They all come with 3/16" (5 mm) galvanized wire cable. Certified to CSA and meet and exceed ANSI and OSHA. RATED FOR 310LBS WEIGHT CAPACITY.



FP2NNN25C



FP3NN50CR

SELF-RETRACTING LIFELINES

PART NO.	LIFELINE MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	WEIGHT	LENGTH
FP2NN25C	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	11 LB (5 KG)	25 FT (8 M)
FP2NN50C	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	22 LB (10 KG)	50 FT (15 M)
FP2NN100C	GALVANIZED CABLE	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	42 LB (19 KG)	100 FT (30 M)

SELF-RETRACTING LIFELINES WITH INTEGRATED RETRIEVAL WINCH

PART NO.	LIFELINE MATERIAL	RETRIEVAL WINCH	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	WEIGHT	LENGTH
FP3NN50CR	GALVANIZED CABLE	3 WAY	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	33 LBS (15 KG)	50 FT (15 M)
FP3NN85CR	GALVANIZED CABLE	3 WAY	SWIVEL HOOK (WITH LOAD INDICATOR)	CARABINER	46 LB (21 KG)	85 FT (26 M)



Rope & Web Lanyards

CERTIFIED BY CSA CANADA



FP61114/4

FP61111/4



FP63101/4



FP63111/4



FP63213/6



FP63118/2



FP635133/4

3-STRAND NYLON ROPE LANYARD

This type of lanyard is almost exclusively used for travel restraint.

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP61111/4	3-STRAND NYLON OF (5/8") 16 MM	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP61113/4	3-STRAND NYLON OF (5/8") 16 MM	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP61114/4	3-STRAND NYLON OF (5/8") 16 MM	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT

FIXED AND ADJUSTABLE LENGTH WEB LANYARDS WITHOUT ENERGY ABSORBERS

This lanyard is designed for travel restraint.

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG FIXED LANYARDS				
FP63101/4	1" POLYESTER WEBBING	SEWN LOOP	SNAP HOOK	4-5-6 FT
FP63111/4	1" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP63113/4	1" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP63114/4	1" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT

SINGLE LEG AJUSTABLE LANYARDS

FP63211/6	1" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	6 FT
FP63213/6	1" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK	6 FT
FP63214/6	1" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK	6 FT

DOUBLE LEG FIXED Y-LANYARDS

FP635111/4	1" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FP635133/4	1" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FP635144/4	1" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT

REMOVABLE EXTENDED BACK D-RING

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP63118/2	POLYESTER	SNAP HOOK	3" CIRCULAR RING	2 FT
FP641E7	POLYESTER	LOOP	SMALL D-RING	18 IN

Dyna-Fusion 2 in 1 Lanyards



CERTIFIED BY CSA CANADA

Dynamic's Dyna-Fusion Energy absorber is a revolutionary new products that is the Fusion between a CSA E4 and CSA E6 energy absorber eliminating the guess work as to what energy absorber should be used for a specific user's weight. The Hybrid lanyard is rated for user's weighing between 100 and 386lbs eliminating confusion and provides peace of mind that they are using the right equipment.



FP105311/6



FP1056133/6



FP1053AC/6



FP1056ACC/6



FP6331T/4



FP7371TT/6

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

SINGLE LEG FIXED LENGTH LANYARD WITH ENERGY ABSORBER

FP105311/6	POLYESTER	SNAP HOOK	SNAP HOOK	6 FT
FP105313/6	POLYESTER	SNAP HOOK	REBAR HOOK	6 FT
FP105314/6	POLYESTER	SNAP HOOK	SCAFFOLD HOOK	6 FT
FP1053AA/6	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	6 FT
FP1053AC/6	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	6 FT

DOUBLE LEG FIXED Y-LANYARD WITH ENERGY ABSORBER

FP1056111/6	POLYESTER	SNAP HOOK	SNAP HOOK (2)	6 FT
FP1056133/6	POLYESTER	SNAP HOOK	REBAR HOOK (2)	6 FT
FP1056144/6	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	6 FT
FP1056AAA/6	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	6 FT
FP1056ACC/6	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	6 FT

Tie-Back Lanyards



CERTIFIED BY CSA CANADA

Tie-Back lanyards provides the ability to wrap the lanyard leg around a structure and connect back to itself. The auto lock carabiner with 5000lb gate strength ensure there are no accidental disconnections. This lanyard eliminates the need for an additional anchorage connector.

PART NO.	MATERIAL	TYPE	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	------	-------------------	---------------------	--------

SINGLE LEG LANYARD WITH E4 ENERGY ABSORBER

FP6331T/6	POLYESTER	FIXED	SNAP HOOK	TIE-BACK SNAP	6 FT
FP6341T/6	POLYESTER	ADJUSTABLE	SNAP HOOK	TIE-BACK SNAP	6 FT

DOUBLE LEG Y-LANYARD WITH E4 ENERGY ABSORBER

FP6361TT/6	POLYESTER	FIXED	SNAP HOOK	TIE-BACK SNAP	6 FT
FP6371TT/6	POLYESTER	ADJUSTABLE	SNAP HOOK	TIE-BACK SNAP	6 FT

SINGLE LEG LANYARD WITH E6 ENERGY ABSORBER

FP7331T/6	POLYESTER	FIXED	SNAP HOOK	TIE-BACK SNAP	6 FT
FP7341T/6	POLYESTER	ADJUSTABLE	SNAP HOOK	TIE-BACK SNAP	6 FT

DOUBLE LEG Y-LANYARD WITH E6 ENERGY ABSORBER

FP7361TT/6	POLYESTER	FIXED	SNAP HOOK	TIE-BACK SNAP	6 FT
FP7371TT/6	POLYESTER	ADJUSTABLE	SNAP HOOK	TIE-BACK SNAP	6 FT

Dyna-Pak E4 Lanyards



CERTIFIED BY CSA CANADA

This lanyard is specifically designed for fall arrest purposes for workers weighing between 100-254lbs. With many hardware options and webbing types, it will provide you with the best option to best suit your specific application. It is very important for the user to calculate the fall clearance requirement when using a lanyard with an energy absorber. (SEE calculations on page 47)

FP63311/6

FP63313/6

FP63413/6

FP636111/6

FP633AC/4

FP636111/6

FP636ACC/4

FP64311/6

FP64314/4

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

SINGLE LEG FIXED LENGTH LANYARD WITH E4 ENERGY ABSORBER

FP63311/4	1" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	4-5-6FT
FP63313/4	1" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK	4-5-6FT
FP63314/4	1" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK	4-5-6FT
FP633AA/4	1" POLYESTER WEBBING	ALUM SNAP HOOK	ALUM SNAP HOOK	4-5-6FT
FP633AC/4	1" POLYESTER WEBBING	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	4-5-6FT

ADJUSTABLE SINGLE LEG LANYARD WITH E4 ENERGY ABSORBER

FP63411/6	1" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	6 FT
FP63413/6	1" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK	6 FT
FP63414/6	1" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK	6 FT

DOUBLE LEG FIXED Y-LANYARD WITH E4 ENERGY ABSORBER

FP636111/4	1" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FP636133/4	1" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FP636144/4	1" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT
FP636AAA/4	1" POLYESTER WEBBING	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	4-5-6 FT
FP636ACC/4	1" POLYESTER WEBBING	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	4-5-6 FT

DOUBLE LEG ADJUSTABLE Y-LANYARD WITH E4 ENERGY ABSORBER

FP637111/4	1" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FP637133/4	1" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FP637144/4	1" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT

FIXED & CONTINUOUS SINGLE LEG LANYARD WITH E4 ENERGY ABSORBER

FP64311/4	1-3/4" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP64313/4	1-3/4" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP64314/4	1-3/4" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT



Dyna-Pak E6 Lanyards

CERTIFIED BY CSA CANADA

This lanyard is specifically designed for fall arrest purposes for workers weighing between 200-386 lbs. With many hardware options and webbing types, it will provide you with the best option to best suit your specific application. It is very important for the user to calculate the fall clearance requirement when using a lanyard with an energy absorber. (SEE calculations on page 47)

LANYARDS FIXED LENGTH WITH "DYNA-PAK E6" ENERGY ABSORBER

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG LANYARD WITH E6 ENERGY ABSORBER				
FP73311/4	POLYESTER	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP73313/4	POLYESTER	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP73314/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT
FP733AA/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	4-5-6 FT
FP733AC/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	4-5-6 FT

SINGLE LEG ADJUSTABLE LANYARD WITH E6 ENERGY ABSORBER

FP73411/4	POLYESTER	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP73413/4	POLYESTER	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP73414/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT

DOUBLE LEG Y-LANYARD WITH E6 ENERGY ABSORBER

FP736111/4	POLYESTER	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FP736133/4	POLYESTER	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FP736144/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT
FP736AAA/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	4-5-6 FT
FP736ACC/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	4-5-6 FT

DOUBLE LEG ADJUSTABLE Y-LANYARD WITH E6 ENERGY ABSORBER

FP737111/4	POLYESTER	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FP737133/4	POLYESTER	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FP737144/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT

FIXED & CONTINUOUS SINGLE LEG LANYARD WITH E6 ENERGY ABSORBER

FP77311/4	2" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP77313/4	2" POLYESTER WEBBING	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP77314/4	2" POLYESTER WEBBING	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT



FP73311/4



FP733AC/4



FP73413/46



FP736111/6



FP736144/4



FP77311/4



FP736ACC/4

Cable Lanyards with E4 & E6 “Dyna-Pak” Energy Absorber



CERTIFIED BY CSA CANADA

Cable lanyards with PVC coatings provides additional durability to withstand harsh conditions making it more versatile in more applications. Flemish eyes termination on the cable provides additional safety to ensure that the product will perform when required.



FP66311/4



FP66314/4



FP666133/4



FP76311/4



FP766144/4

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LANYARD WITH E4 ENERGY ABSORBER				
FP66311/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP66313/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP66314/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT

DOUBLE LEG Y-LANYARD WITH E4 ENERGY ABSORBER

FP666111/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	(2) SNAP HOOK	4-5-6 FT
FP666133/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	(2) REBAR HOOK	4-5-6 FT
FP666144/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	(2) SCAFFOLD HOOK	4-5-6 FT

SINGLE LANYARD WITH E6 ENERGY ABSORBER

FP76311/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP76313/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP76314/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT

DOUBLE LEG Y-LANYARD WITH E6 ENERGY ABSORBER

FP766111/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	(2) SNAP HOOK	4-5-6 FT
FP766133/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	(2) REBAR HOOK	4-5-6 FT
FP766144/4	1/4" STEEL CABLE W/ PVC COATING	SNAP HOOK	(2) SCAFFOLD HOOK	4-5-6 FT

Dyna-Yard Lanyards



CERTIFIED BY CSA CANADA

The "DYNA-YARD" Lanyard from DYNAMIC has a built in easy to use Fall Indicator/Checker system woven into the webbing, that offers a quick and simple visual check for the recommended and required pre-use inspection. Designed to reduce the impact load experienced during a fall to a maximum of 4 KN (900 lbs) or less. This lanyard meets and exceeds the ANSI and OSHA regulations and is CSA certified by CSA Canada.



PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

DYNA-YARD LANYARD WITH INTEGRATED E4 ENERGY ABSORBER

FP65811/4	POLYESTER	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP65813/4	POLYESTER	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP65814/4	POLYESTER	FS6650HS	SCAFFOLD HOOK	4-5-6 FT

DYNA-YARD Y-LANYARD WITH INTEGRATED E4 ENERGY ABSORBER

FP65911/4	POLYESTER	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FP65913/4	POLYESTER	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FP65914/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT

B-Compliant Econo Lanyards



CERTIFIED BY CSA CANADA

In order to complete our offering of econo products, DYNAMIC has produced a line of lanyards to go along with our "B-COMPLIANT" harnesses. It's made with the same high quality polyester webbing except in a different color; we have also changed the forged connectors to stamped connectors in order to reduce the pricing. The quality of the product is still excellent and the product still meet ANSI and OSHA regulations and is CSA Certified by CSA Canada.

B-COMPLIANT LANYARD WITH DYNA-PAK E4 ENERGY ABSORBER

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP64322/4	POLYESTER	STAMPED SNAP	STAMPED SNAP	4-6 FT

B-COMPLIANT LANYARD WITH DYNA-YARD INTEGRATED E4 ENERGY ABSORBER

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP65822/4	POLYESTER	STAMPED SNAP	STAMPED SNAP	4-6 FT

Kevlar Lanyard



CERTIFIED BY CSA CANADA

Meets and exceed ASTM F887-13 Arc Flash.



FP68311/4

FP686111/4



FP78313/4

FP786133/4

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

SINGLE LEG LANYARD WITH "DYNA-PAK E4" ENERGY ABSORBER

FP68311/4	KEVLAR®	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP68313/4	KEVLAR®	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP68314/4	KEVLAR®	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT

DOUBLE LEG Y-LANYARD WITH "DYNA-PAK E4" ENERGY ABSORBER

FP686111/4	KEVLAR®	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FP686133/4	KEVLAR®	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FP686144/4	KEVLAR®	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT

SINGLE LEG LANYARD WITH "DYNA-PAK E6" ENERGY ABSORBER

FP78311/4	KEVLAR®	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP78313/4	KEVLAR®	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP78314/4	KEVLAR®	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT

DOUBLE LEG Y-LANYARD WITH "DYNA-PAK E6" ENERGY ABSORBER

FP786111/4	KEVLAR®	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FP786133/4	KEVLAR®	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FP786144/4	KEVLAR®	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT

Coated Lanyards



CERTIFIED BY CSA CANADA



FPC64311/4

FPC646144/4

FPC74311/4

FPC746144/4

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

SINGLE LEG LANYARD WITH "DYNA-PAK E4" ENERGY ABSORBER

FPC64311/4	COATED POLYESTER	SNAP HOOK	SNAP HOOK	4-5-6 FT
FPC64313/4	COATED POLYESTER	SNAP HOOK	REBAR HOOK	4-5-6 FT
FPC64314/4	COATED POLYESTER	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT

DOUBLE LEG Y-LANYARD WITH "DYNA-PAK E4" ENERGY ABSORBER

FPC646111/4	COATED POLYESTER	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FPC646133/4	COATED POLYESTER	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FPC646144/4	COATED POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT

SINGLE LEG LANYARD WITH "DYNA-PAK E6" ENERGY ABSORBER

FP74311/4	COATED POLYESTER	SNAP HOOK	SNAP HOOK	4-5-6 FT
FP74313/4	COATED POLYESTER	SNAP HOOK	REBAR HOOK	4-5-6 FT
FP74314/4	COATED POLYESTER	SNAP HOOK	SCAFFOLD HOOK	4-5-6 FT

DOUBLE LEG Y-LANYARD WITH "DYNA-PAK E6" ENERGY ABSORBER

FPC746111/4	COATED POLYESTER	SNAP HOOK	SNAP HOOK (2)	4-5-6 FT
FPC746133/4	COATED POLYESTER	SNAP HOOK	REBAR HOOK (2)	4-5-6 FT
FPC746144/4	COATED POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	4-5-6 FT

Tower Lanyards with E4 Energy Absorber



CERTIFIED BY CSA CANADA



FP634AAR/6



FP637ACCR/6



FP634AAQ/6



FP637ACCQ/6



FP633AAL/6



FP636ACCL/4

TOWER LANYARDS WITH O-RING FOR RESCUE

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG ADJUSTABLE LENGTH LANYARD WITH E4 ENERGY ABSORBER				
FP634AAR/6	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	6 FT
FP634ACR/6	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	6 FT
DOUBLE LEG Y-LANYARD ADJUSTABLE LENGTH WITH INTEGRATED E4 ENERGY ABSORBER				
FP637AAR/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	6 FT
FP637ACCR/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	6 FT

TOWER LANYARDS WITH TIE BACK ADJUSTABLE LOOP AND O-RING

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG ADJUSTABLE LENGTH LANYARD WITH E4 ENERGY ABSORBER				
FP634AAQ/6	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	6 FT
FP634ACQ/6	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	6 FT
DOUBLE LEG Y-LANYARD ADJUSTABLE LENGTH WITH INTEGRATED E4 ENERGY ABSORBER				
FP637AAAQ/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	6 FT
FP637ACCQ/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	6 FT

TOWER LANYARDS WITH 3 FT TIE BACK LOOP FIXED

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG ADJUSTABLE LENGTH LANYARD WITH E4 ENERGY ABSORBER				
FP633AAL/6	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	4, 5, 6 FT
FP633ACL/6	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	4, 5, 6 FT
DOUBLE LEG Y-LANYARD ADJUSTABLE LENGTH WITH INTEGRATED E4 ENERGY ABSORBER				
FP636AAL/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	4, 5, 6 FT
FP636ACCL/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	4, 5, 6 FT

Tower Lanyards with E6 Energy Absorber



CERTIFIED BY CSA CANADA

TOWER LANYARDS WITH O-RING FOR RESCUE

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

SINGLE LEG ADJUSTABLE LENGTH LANYARD WITH E6 ENERGY ABSORBER

FP734AAR/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	6 FT
FP734ACR/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	6 FT

DOUBLE LEG Y-LANYARD ADJUSTABLE LENGTH WITH INTEGRATED E6 ENERGY ABSORBER

FP737AAAR/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	6 FT
FP737ACCR/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	6 FT

TOWER LANYARDS WITH TIE BACK ADJUSTABLE LOOP AND O-RING

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

SINGLE LEG ADJUSTABLE LENGTH LANYARD WITH E6 ENERGY ABSORBER

FP734AAQ/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	6 FT
FP734ACQ/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	6 FT

DOUBLE LEG Y-LANYARD ADJUSTABLE LENGTH WITH INTEGRATED E6 ENERGY ABSORBER

FP737AAAQ/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	6 FT
FP737ACCQ/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	6 FT

TOWER LANYARDS WITH 3 FT TIE BACK LOOP FIXED

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

SINGLE LEG ADJUSTABLE LENGTH LANYARD WITH E6 ENERGY ABSORBER

FP733AAL/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK	4, 5, 6 FT
FP733ACL/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK	4, 5, 6 FT

DOUBLE LEG Y-LANYARD ADJUSTABLE LENGTH WITH INTEGRATED E6 ENERGY ABSORBER

FP736AAL/4	POLYESTER	ALUM SNAP HOOK	ALUM SNAP HOOK (2)	4, 5, 6 FT
FP736ACCL/4	POLYESTER	ALUM SNAP HOOK	ALUM SCAFFOLD HOOK (2)	4, 5, 6 FT



FP734AAR/4



FP737ACCR/4

FP734AAQ/4



FP737ACCQ/4

FP733AAL/4



FP736ACCL/4

Stretch Lanyards with E4 or E6 Energy Absorber

LANYARD LEG WILL CONTRACT 18"



CERTIFIED BY CSA CANADA



FP6S311



FP6S6144



FP643FG/6

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

SINGLE LEG LANYARD WITH "DYNA-PAK E4" ENERGY ABSORBER

FP6S311 X	POLYESTER	SNAP HOOK	SNAP HOOK	5, 6 FT
FP6S313 X	POLYESTER	SNAP HOOK	REBAR HOOK	5, 6 FT
FP6S314 X	POLYESTER	SNAP HOOK	SCAFFOLD HOOK	5, 6 FT

DOUBLE LEGS Y-LANYARD WITH "DYNA-PAK E4" ENERGY ABSORBER

FP6S6111 X	POLYESTER	SNAP HOOK	SNAP HOOK (2)	5, 6 FT
FP6S6133 X	POLYESTER	SNAP HOOK	REBAR HOOK (2)	5, 6 FT
FP6S6144 X	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	5, 6 FT

SINGLE LEG LANYARD WITH "DYNA-PAK E6" ENERGY ABSORBER

FP7S311 X	POLYESTER	SNAP HOOK	SNAP HOOK	5, 6 FT
FP7S313 X	POLYESTER	SNAP HOOK	REBAR HOOK	5, 6 FT
FP7S314 X	POLYESTER	SNAP HOOK	SCAFFOLD HOOK	5, 6 FT

DOUBLE LEGS Y-LANYARD WITH "DYNA-PAK E6" ENERGY ABSORBER

FP7S6111 X	POLYESTER	SNAP HOOK	SNAP HOOK (2)	5, 6 FT
FP7S6133 X	POLYESTER	SNAP HOOK	REBAR HOOK (2)	5, 6 FT
FP7S6144 X	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	5, 6 FT

Anti-Corrosion Lanyard



CERTIFIED BY CSA CANADA

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
----------	----------	-------------------	---------------------	--------

FP643FG	POLYESTER	ALUMINUM CARABINER	LARGE ALUM CARABINER	4, 5, 6 FT
---------	-----------	--------------------	----------------------	------------


CERTIFIED BY CSA CANADA

1/2" reflective strip on 1 3/4 in (45 mm) web lanyard with "DYNA-PAK E4" or "DYNA-PAK E6" energy absorber


FP6R311/4

FP6R313/4

FPPOLEST

FPADRL

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG LANYARD WITH "DYNA-PAK E4" ENERGY ABSORBER				
FP6R311/4	POLYESTER	SNAP HOOK	SNAP HOOK	4, 5, 6 FT
FP6R313/4	POLYESTER	SNAP HOOK	REBAR HOOK	4, 5, 6 FT
FP6R314/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK	4, 5, 6 FT

TWIN LEGS LANYARD WITH "DYNA-PAK E4" ENERGY ABSORBER

FP6R6111/4	POLYESTER	SNAP HOOK	SNAP HOOK (2)	4, 5, 6 FT
FP6R6133/4	POLYESTER	SNAP HOOK	REBAR HOOK (2)	4, 5, 6 FT
FP6R6144/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	4, 5, 6 FT

SINGLE LEGS LANYARD WITH "DYNA-PAK E6" ENERGY

FP7R311/4	POLYESTER	SNAP HOOK	SNAP HOOK	4, 5, 6 FT
FP7R313/4	POLYESTER	SNAP HOOK	REBAR HOOK	4, 5, 6 FT
FP7R314/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK	4, 5, 6 FT

TWIN LEGS LANYARD WITH "DYNA-PAK E6" ENERGY ABSORBER

FP7R6111/4	POLYESTER	SNAP HOOK	SNAP HOOK (2)	4, 5, 6 FT
FP7R6133/4	POLYESTER	SNAP HOOK	REBAR HOOK (2)	4, 5, 6 FT
FP7R6144/4	POLYESTER	SNAP HOOK	SCAFFOLD HOOK (2)	4, 5, 6 FT

Pole Strap & Positioning Lanyard


CERTIFIED BY CSA CANADA
POLE STRAP

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FPPOLEST	POLYESTER	SNAP HOOK	SNAP HOOK	2 FT

ADJUSTABLE ROPE POLE POSITIONING LANYARD

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FPADRL	KERNMANTLE	3/4" ALUMINUM CARABINER	ALUMINUM ROPE ADJUSTER	8 FT

Dyna-Pak Energy Absorbers and Extended D-Ring



CERTIFIED BY CSA CANADA

DYNA-PAK ENERGY ABSORBER WITH CONNECTORS

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
DYNA-PAK E4 ENERGY ABSORBER				
FP60311	POLYESTER	SNAP HOOK	SNAP HOOK	18 IN
FP60391	POLYESTER	SNAP HOOK	LARGE D-RING	18 IN
FP60377	POLYESTER	SMALL D-RING	SMALL D-RING	13.5 IN
FP60399	POLYESTER	LARGE D-RING	LARGE D-RING	16.5 IN
FP603E1	POLYESTER	LOOP	SNAP HOOK	16.5 IN
FP603E9	POLYESTER	LOOP	LARGE D RING	16.5 IN

DYNA-PAK E6 ENERGY ABSORBER

FP70311	POLYESTER	SNAP HOOK	SNAP HOOK	18 IN
FP70391	POLYESTER	SNAP HOOK	LARGE D-RING	18 IN
FP70377	POLYESTER	SMALL D-RING	SMALL D-RING	13.5 IN
FP70399	POLYESTER	LARGE D-RING	LARGE D-RING	16.5 IN
FP703E1	POLYESTER	LOOP	SNAP HOOK	16.5 IN
FP703E9	POLYESTER	LOOP	LARGE D RING	16.5 IN

Rebar Assemblies



CERTIFIED BY CSA CANADA

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
FP635113	POLYESTER	SNAP HOOK (2)	SCAFFOLD HOOK	22 IN
FP675113	STEEL	SNAP HOOK (2)	SCAFFOLD HOOK	28 IN

FP60311

FP60391

FP60377

FP70311

FP70377

FP70399

FP675113

FP635113



Hooks & Carabiners

CERTIFIED BY CSA CANADA

Hooks and Carabiners offer a multitude of applications and all are available in various forms and sizes. They offer maximum protection and all offer double locking or auto locking closures. They are designed to give you the greatest ease of operation. All are approved for a maximum load of 5000 lbs (22kn) unless other wise specified. CSA, ANSI and CE certified.

DOUBLE LOCKING SMALL ERGONOMIC SNAP HOOKS

PART NO.	CONSTRUCTION	OPENING	TYPE OF LOCK
FP6650HS	FORGE STEEL	3/4 IN (19 MM)	DOUBLE LOCKING HIGH PERFORMANCE
FP6650ALL	ALUMINUM	3/4 IN (19 MM)	DOUBLE LOCKING HIGH PERFORMANCE
FP4651	FORGE STEEL/SWIVEL	3/4 IN (19 MM)	DOUBLE LOCKING
FP9652HS	STAMPED STEEL	3/4 IN (19 MM)	DOUBLE LOCKING HIGH PERFORMANCE
FP3618	FORGE STEEL	3/4 IN (19 MM)	DOUBLE LOCKING 5000 LBS GATE SNAP

DOUBLE LOCKING LARGE ERGONOMIC REBAR AND SCAFFOLD HOOKS

PART NO.	CONSTRUCTION	OPENING	TYPE OF LOCK
FP5386HS	FORGE STEEL	2 IN (50 MM)	DOUBLE LOCKING HIGH PERFORMANCE
FP5395HS	FORGE STEEL	2.5 IN (64 MM)	DOUBLE LOCKING HIGH PERFORMANCE
FP5395ALL	ALUMINUM	2.5 IN (64 MM)	DOUBLE LOCKING HIGH PERFORMANCE

TWIST LOCK CARABINER CONNECTOR

PART NO.	CONSTRUCTION	OPENING	TYPE OF LOCK
FP244	ALLOY STEEL & HEAT TREATED "D" SHAPE	3/4 IN (19 MM)	AUTO-TWIST LOCK TRIPLE ACTION
FP714	ALLOY STEEL & HEAT TREATED PEAR SHAPE	2-1/4 IN (57 MM)	AUTO-TWIST LOCK TRIPLE ACTION
FP415	ALLOY STEEL & HEAT TREATED "D" SHAPE	5/8 IN (16 MM)	AUTO-TWIST LOCK
FP775	ALLOY STEEL & HEAT TREATED "D" SHAPE	1 IN (25 MM)	AUTO-TWIST LOCK
FP843	ALLOY STEEL & HEAT TREATED "D" SHAPE	3/4 IN (19 MM)	AUTO-TWIST LOCK
FP261	ALLOY STEEL & HEAT TREATED "D" SHAPE W/ CAPTIVE EYE	3/4 IN (19 MM)	AUTO-TWIST LOCK
FP714ALL	ALUMINIUM, PEAR SHAPE	2-1/4 IN (57 MM)	AUTO-TWIST LOCK
FP415ALL	ALUMINIUM "D" SHAPE	5/8 IN (16 MM)	AUTO-TWIST LOCK
FP775ALL	ALUMINIUM "D" SHAPE	1 IN (25 MM)	AUTO-TWIST LOCK
FP261ALL	ALUMINIUM "D" SHAPE	3/4 IN (19 MM)	AUTO-TWIST LOCK

PLASTIC SEPARATOR

PART NO.	DESCRIPTION
FP731	PLASTIC SEPARATOR FOR DUAL SELF-RETRACTING DEVICES

FP6650HS

FP4651

FP9652HS

FP5386HS

FP5395HS

FP5395ALL

FP415

FP9652

FP714

FP775

FP244

FP261

FP731

(Shown on FP244)

Vertical Rope Lifelines



CERTIFIED BY CSA CANADA



FP58KRM25



FP16EPS25



FP58EPS25



FP58EPS25A



FP58EPS25B



FP58EPS25C

PART NO.	MATERIAL	CONNECTORS	LENGTH
FP58KRM25	KERMANTLE ROPE 16 MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	25 FT (7.6 M)
FP58KRM50	KERMANTLE ROPE 16 MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	50 FT (15.2 M)
FP58KRM100	KERMANTLE ROPE DE 16 MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	100 FT (30.5 M)
FP16EPS25	LOW COST 3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	25 FT (7.6 M)
FP16EPS50	LOW COST 3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	50 FT (15.2 M)
FP58EPS25	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	25 FT (7.6 M)
FP58EPS50	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	50 FT (15.2 M)
FP58EPS75	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	75 FT (22.8 M)
FP58EPS100	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 CARABINER #FP415	100 FT (30.5 M)
FP58EPS25A	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SNAP HOOK #6650HS	25 FT (7.6 M)
FP58EPS50A	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SNAP HOOK #6650HS	50 FT (15.2 M)
FP58EPS75A	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SNAP HOOK #6650HS	75 FT (22.8 M)
FP58EPS100A	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SNAP HOOK #FP6650HS	100 FT (30.5 M)
FP58EPS25B	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 REBAR HOOK #FP5386HS	25 FT (7.6 M)
FP58EPS50B	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 REBAR HOOK #FP5386HS	50 FT (15.2 M)
FP58EPS75B	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 REBAR HOOK #FP5386HS	75 FT (22.8 M)
FP58EPS100B	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 REBAR HOOK #FP5386HS	100 FT (30.5 M)
FP58EPS25C	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SCAFFOLD HOOK #FP5395HS	25 FT (7.6 M)
FP58EPS50C	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SCAFFOLD HOOK #FP5395HS	50 FT (15.2 M)
FP58EPS75C	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SCAFFOLD HOOK #FP5395HS	75 FT (22.8 M)
FP58EPS100C	3-STRAND CO-POLYMER BLEND ROPE 16MM (5/8 PO)	1 TERMINATION & 1 SCAFFOLD HOOK #FP5395HS	100 FT (30.5 M)

NOTE: Other configurations of vertical lifelines also available. See our price list for more details.
All our vertical lifelines are shrink wrapped at both spliced termination ends.

Rope Grabs



CERTIFIED BY CSA CANADA

Our lifelines and rope grab kits are a practical solution for many fall arrest applications. Our Rope Grab is equipped with a Panic Lock feature as well as an orientation lock out feature that will not allow the rope grab to be installed upside down. All of our Vertical rope lifelines and rope grabs combinations meet and exceed ANSI, OSHA and CSA certified.



PART NO. DESCRIPTION

FP131L	AUTOMATIC ROPE GRAB (LARGE EYE)
FP131L/2.5	AUTOMATIC ROPE GRAB (LARGE EYE) WITH 2.5 FT (0.77M) DYNA-PAK E4 ENERGY ABSORBING LANYARD & (1) DOUBLE LOCKING ERGONOMIC SNAP HOOK FP6650HS
FP141	AUTOMATIC ROPE GRAB WITH PANIC LOCK (SMALL EYE)
FP141L	AUTOMATIC ROPE GRAB WITH PANIC LOCK (LARGE EYE)
FP142/2	AUTOMATIC ROPE GRAB WITH PANIC LOCK (SMALL EYE) WITH 2 FT (0.6M) DYNA-PAK E4 ENERGY ABSORBING LANYARD & (1) DOUBLE LOCKING ERGONOMIC SNAP HOOK FP6650HS
FP142/3	AUTOMATIC ROPE GRAB WITH PANIC LOCK (SMALL EYE) WITH 2.5 FT (0.8M) DYNA-PAK E4 ENERGY ABSORBING LANYARD & (1) DOUBLE LOCKING ERGONOMIC SNAP HOOK FP6650HS
FP142L/2	AUTOMATIC ROPE GRAB WITH PANIC LOCK (LARGE EYE) WITH 2 FT (0.6M) DYNA-PAK E4 ENERGY ABSORBING LANYARD & (1) DOUBLE LOCKING ERGONOMIC SNAP HOOK FP6650HS
FP142L/3	AUTOMATIC ROPE GRAB WITH PANIC LOCK (LARGE EYE) WITH 2.5 FT (0.8M) DYNA-PAK E4 ENERGY ABSORBING LANYARD & (1) DOUBLE LOCKING ERGONOMIC SNAP HOOK FP6650HS
FP162/2	AUTOMATIC ROPE GRAB WITH PANIC LOCK (SMALL EYE) WITH 2 FT (0.6M) DYNA-PAK E6 ENERGY ABSORBING LANYARD & (1) DOUBLE LOCKING ERGONOMIC SNAP HOOK FP6650HS
FP162/3	AUTOMATIC ROPE GRAB WITH PANIC LOCK (SMALL EYE) WITH 2.5 FT (0.8M) DYNA-PAK E6 ENERGY ABSORBING LANYARD & (1) DOUBLE LOCKING ERGONOMIC SNAP HOOK FP6650HS
FP162L/2	AUTOMATIC ROPE GRAB WITH PANIC LOCK (LARGE EYE) WITH 2 FT (0.6M) DYNA-PAK E6 ENERGY ABSORBING LANYARD & (1) DOUBLE LOCKING ERGONOMIC SNAP HOOK FP6650HS
FP162L/3	AUTOMATIC ROPE GRAB WITH PANIC LOCK (LARGE EYE) WITH 2.5 FT (0.8M) DYNA-PAK E6 ENERGY ABSORBING LANYARD & (1) DOUBLE LOCKING ERGONOMIC SNAP HOOK FP6650HS

DYNA-PAK ENERGY ABSORBING LANYARD TO BE USED WITH ROPE GRABS

PART NO.	MATERIAL	CONNECTOR HARNESS	CONNECTOR ANCHORAGE	LENGTH
SINGLE LEG LANYARD WITH E4 ENERGY ABSORBER				
FP64311/2.5	1-3/4" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	2.5 FT
SINGLE LEG LANYARD WITH E6 ENERGY ABSORBER				
FP77311/2.5	2" POLYESTER WEBBING	SNAP HOOK	SNAP HOOK	2.5 FT

Anchorage Connectors

At DYNAMIC we offer a complete line of anchorage connectors that meet all needs. DSI's anchorage connectors are produced and are designed to be used for a variety of Fall Arrest applications. Each has minimum tensile strength of 5000 lbs (22kn).

PART NO.	DESCRIPTION	LENGTH
FP10	CABLE SLING 1/4"(6MM) GALVANIZED STEEL CLEAR PVC COATED AGAINST CORROSION SWAGED EYES AT EACH END	3 FT (0.9M), 4 FT (1.2 M) 5 FT (1.5M), 6 FT (1.8 M)
FP10F	CABLE SLING 1/4" (6MM) GALVANIZED STEEL RED PVC COATED AGAINST CORROSION FLEMISH EYE SPLICE AT EACH END	3 FT (0.9M), 4 FT (1.2 M) 5 FT (1.5M), 6 FT (1.8 M)
FP10/3FC	CABLE SLING CHOKER 1/4 IN (6MM) GALVANIZED CABLE WITH PVC COATED FLEMISH EYE AT BOTH ENDS. ONE (1) O-RING OF 2 IN (50 MM) AT ONE END AND ONE (1) O-RING OF 3 IN AT THE OTHER END. THE 2 IN TO BE SLIDE IN THE 3 IN TO CREATE THE CHOKER.	3 FT (0.9M), 4 FT (1.2 M) 5 FT (1.5M), 6 FT (1.8 M)
FP10/3FD	CABLE SLING CHOKER 1/4 IN (6 MM) GALVANIZED CABLE WITH PVC COATED FLEMISH EYE AT BOTH ENDS. ONE (1) O-RING OF 3 IN (50 MM) AT ONE END AND ONE (1) SNAP HOOK MODEL FP6650HS AT THE OTHER END. THE SNAP HOOK TO BE SLIDE IN THE 3 IN TO CREATE THE CHOKER.	3 FT (0.9M), 4 FT (1.2 M) 5 FT (1.5M), 6 FT (1.8 M)
FP10/3FE	CABLE SLING CHOKER 1/4 IN (6 MM) GALVANIZED CABLE WITH PVC COATED FLEMISH EYE AT BOTH ENDS. ONE (1) SNAP HOOK MODEL FP6650HS AT THE END	3 FT (0.9M), 4 FT (1.2 M) 5 FT (1.5M), 6 FT (1.8 M)
FP11	PASS THROUGH ANCHOR SLING 2"(50MM), POLYESTER WEBBING (1) SMALL D-RING AND (1) LARGE D-RING	3 FT (0.9 M) 4 FT (1.2 M), 6 FT (1.8 M)
FP12	CROSS ARM ANCHOR SLING 2"(50MM), POLYESTER WEBBING WITH SEWN LOOP AND (1) LARGE D-RING THAT PASS THROUGH THE LOOP TO TIGHTEN AROUND AND ANCHOR POINT	3"(0.9 M) 4 FT (1.2 M), 6 FT (1.8 M)
FP13	RESIDENTIAL ANCHOR SLING. HEAVY DUTY POLYESTER WEBBING	3 FT (0.9 M)
FP15/1.4	SCAFFOLD ANCHOR SLING 2" (50MM)NYLON WEBBING WITH SEWN LOOP AND (1) LARGE D-RING	17 IN (0.4 M)
FP16/3.5	DISPOSABLE ANCHOR SLING WITH PROTECTIVE SLEEVE	3.5 FT (1 M)
FP17/4	DISPOSABLE ANCHOR SLING WITHOUT PROTECTIVE SLEEVE	4 FT (1,2 CM)

FP10F

FP10

FP10FD

FP12

FP11

FP15/1.4

FP13

FP16/3.5

FP3730



FP3731



FP3733-75



FP3734-10Y



FP3735-DTA5



FP3734-10S



VARIOUS ANCHORAGE CONNECTORS

PART NO.	DESCRIPTION
FP3730	D-RING ANCHORAGE CONNECTOR 3/4" HOLE
FP3731-75	TEMPORARY REMOVABLE CONCRETE ANCHOR. 3/4" DIAMETER RATED FOR 22KN (5000LBS)
FP3731-1	TEMPORARY REMOVABLE CONCRETE ANCHOR. 1" DIAMETER RATED FOR 44KN (10,000LBS)
FP3731-M15	TEMPORARY AND REMOVABLE MINNING BOLT ANCHOR FOR 39MM (1.5IN) HOLES RATED FOR 44KN (10,000LBS)
FP3733-75	TEMPORARY REMOVABLE TOGGLE ANCHOR THAT CAN BE USED ON STEEL OR CONCRETE. 3/4" DIAMETER RATED FOR 22KN (5000LBS)
FP3734-10Y	SEMI-PERMANENT SWIVEL HYBRID D-RING THAT IS REMOVABLE AND RESUSABLE. 1" DIAMETER RATED FOR 44KN (10,000LBS)
FP3735-DTA5	DROP IN ANCHOR WITH D-RING WITH 4IN ROUND PLATE RATED FOR 22KN (5000LBS)

10K ZINC PLATED SWIVEL D-RING

PART NO.	DESCRIPTION
FP3734-10N	10K ZINC PLATED SWIVEL D-RING WITH NO HARDWARE, 5/8" DIAMETER RATED FOR 44KN (10,000LBS)
FP3734-10C	10K ZINC PLATED SWIVEL D-RING WITH CONCRETE HARDWARE. 5/8" DIAMETER RATED FOR 44KN (10,000LBS)
FP3734-10S	10K ZINC PLATED SWIVEL D-RING WITH STEEL HARDWARE. 5/8" DIAMETER RATED FOR 44KN (10,000LBS)
FP3734-10SB	STEEL HARDWARE ONLY FOR 10K ZINC PLATED SWIVEL D-RING
FP3734-10CB	CONCRETE HARDWARE ONLY FOR 10K ZINC PLATED SWIVEL D-RING
FP3734-10W	WELD ON HARDWARE FOR 10K ZINC PLATED SWIVEL D-RING
FP3734-10BP	BACK PLATE FOR 10K ZINC PLATED SWIVEL D-RING

Anchorage Connectors

5K 316 STAINLESS STEEL SWIVEL D-RING

PART NO.	DESCRIPTION
FP3734-5SN	5K 316 STAINLESS STEEL SWIVEL D-RING WITH NO HARDWARE. 5/8" RATED FOR 22KN (5000LBS)
FP3734-5SS	5K 316 STAINLESS STEEL SWIVEL D-RING WITH STEEL HARDWARE. 5/8" RATED FOR 22KN (5000LBS)
FP3734-5SC	5K 316 STAINLESS STEEL SWIVEL D-RING WITH CONCRETE HARDWARE. 5/8" RATED FOR 22KN (5000LBS)
FP3734-5SSB	STEEL HARDWARE ONLY FOR 5K 316SS SWIVEL D-RING
FP3734-5SCB	CONCRETE HARDWARE ONLY FOR 5K 316SS SWIVEL D-RING
FP3734-5ST	CONCRETE TOOL FOR 5K 316SS SWIVEL D-RING
FP3734-5SW	WELD ON HARDWARE ONLY FOR 5K 316SS SWIVEL D-RING

5K ZINC PLATED SWIVEL D-RING

PART NO.	DESCRIPTION
FP3734-5N	5K ZINC PLATED SWIVEL D-RING WITH NO HARDWARE, 5/8" DIAMETER RATED FOR 22KN (5,000LBS)
FP3734-5C	5K ZINC PLATED SWIVEL D-RING WITH COCRETE HARDWARE, 5/8" DIAMETER RATED FOR 22KN (5,000LBS)
FP3734-5S	5K ZINC PLATED SWIVEL D-RING WITH STEEL HARDWARE, 5/8" DIAMETER RATED FOR 22KN (5,000LBS)
FP3734-5SB	STEEL HARDWARE ONLY FOR 5K ZINC PLATED SWIVEL D-RING
FP3734-5CB	CONCRETE HARDWARE ONLY FOR 5K ZINC PLATED SWIVEL D-RING

Beam Anchors

PART NO.	DESCRIPTION
FP3732-414	BEAM CLAMP EASY SLIDER FOR I-BEAM WITH 4-14 IN (100-356 MM) WIDTH
FP3732V-414	VERTICAL BEAM CLAMP EASY SLIDER FOR I-BEAM WITH 4-14 IN (100-356 MM) WIDTH
FP3732-1230	BEAM CLAMP EASY SLIDER FOR I-BEAM WITH 12-30 IN (305-762 MM) WIDTH
FP3800	BEAM TROLLEY WITH WHEELS FOR I-BEAMS WITH 3-10 IN (76-254 MM) WIDTH



FP3734-5SS



FP3734-5S



FP3732-414



FP3732V-414



FP3800

Door / Window Anchor



PART NO.	DESCRIPTION
----------	-------------

FP960	DOOR/WINDOW ANCHOR - PROVIDE A NON-INTRUSIVE ANCHOR POINT AND CAN BE EASILY INSTALLED INSIDE THE INTERIOR OF A BUILDING OR WINDOW OPENING ENABLING THE MOST DIFFICULT JOB TO GET DONE SAFELY. ADJUSTABLE FROM 23.62 IN TO 49.12 IN (59.05CM TO 123.02 CM). STORAGE BAG INCLUDED.
-------	--



Roof Brackets

PART NO.	DESCRIPTION
----------	-------------

FP09D	DISPOSABLE ROOF ANCHOR(WITH NAILS)
FP09R	REUSABLE ROOF ANCHOR (WITH SCREWS)

Rescue and Retrieval Systems

PART NO.	DESCRIPTION
----------	-------------

FP4017B	SPREADER BAR
FPWRISTLETS	WRISTLETS
FPTRAUST	TRAUMA STRAPS
FPWORKSEAT	WORK SEAT FOR LONG TIME WORK ON HEIGHT
FPRESCLAD	LADDER RESCUES SYSTEM WHICH INCLUDES 18 FT LADDER, ROPE AND A BELAY SYSTEM



FPWRISTLETS



FPRESCLAD



FPTRAUST



FPWORKSEAT

Tripods and Accessories

The DYNAMIC Tripods and tripods kits are versatile and lightweight. Made of High-strength aluminum construction with adjustable legs and independent leg locking feature which secure legs in place and spiked feet for slippery surfaces. Devices mounted on the outside to maximize work area under the tripod for work and rescue. Available in 7ft (2m) and 9ft (3m). Withstands up to 5,000 lbs. (22kN). Max worker weight capacity of 360lbs. Meets and exceed all applicable ANSI and CSA standards.

TRIPODS AND TRIPOD KITS

PART NO.	DESCRIPTION
FP09907	7 FT TRIPOD WITH TELESCOPING LEGS THAT CAN ADJUST FROM 4 FT TO 7 FT. ALUMINUM CONSTRUCTION AND STEEL FEET WITH SPIKES FOR SLIPPERY SURFACES.
FP09910	9FT TRIPOD WITH TELESCOPING LEGS THAT CAN ADJUST FROM 7.5 FT TO 9 FT. ALUMINUM CONSTRUCTION AND STEEL FEET WITH SPIKES FOR SLIPPERY SURFACES.
FP09907K3W	TRIPOD KIT WHICH INCLUDES FP09907 7FT TRIPOD, FP09907/1 DEVICE BRACKET, FP3NN50CR 3-WAY SELF-RETRACTING LIFELINE, AND FP1007 BAG.
FP09907K3WA	TRIPOD KIT WHICH INCLUDES FP09907 7FT TRIPOD, FP09907/2 DEVICE BRACKET, FP3AA15CR 3-WAY SELF-RETRACTING LIFELINE, AND FP1007 BAG.

TRIPOD DEVICES BRACKETS

PART NO.	DESCRIPTION
FP09907/1	TRIPOD DEVICE BRACKET DESIGNED FOR FP3NN50CR SELF-RETRACTING LIFELINE 3-WAY DEVICES.
FP09907/2	TRIPOD DEVICE BRACKET DESIGNED FOR FP3AA33CR SELF-RETRACTING LIFELINE 3-WAY DEVICES.

ACCESSORIES FOR TRIPOD

PART NO.	DESCRIPTION
FP099HDPINS	PIN FOR TRIPOD HEAD
FP099RING	TRIPOD O-RING
FP099PULLEY	TRIPOD PULLEY ASSEMBLY
FPTRIPDST7	STRAP FOR 7 FT TRIPOD
FPTRIPDST9	STRAP FOR 9 FT TRIPOD
FP099FEET	TRIPOD FEET
FP099PLPIN	PIN FOR TRIPOD HEAD PULLEY
FP099LGPIN	PIN FOR TRIPOD LEG
FP099BRPIN	PIN FOR DEVICE BRACKETS
FP099BRBOLT	BOLT FOR DEVICE BRACKETS

WINCH

Winch to be used for raising or lowering of personnel or material in confined spaces. Equipped with a mounting plate that connects to the tripod. Galvanized Steel wire rope of 3/16 in dia. Maximum lifting load capacity of 300 lbs. Comes with a Snap Hook Model FP6650 as a connector.

PART NO.	LIFELINE MATERIAL	CONNECTOR ANCHORAGE	LENGTH
FP860	GALVANIZED STEEL	SNAP HOOK	60 FT (18 M)
FP8130	GALVANIZED STEEL	SNAP HOOK	130 FT (40 M)



FP09907/1



FP860

Compliance Kits

BASIC "B-COMPLIANT" KITS IN BAG

PART NO.	DESCRIPTION	SIZE OF HARNESS	LENGTH OF ROPE
FPCKIT01/6	BASIC KIT INCL: (1) FP4001D HARNESS WITH PERMANENTLY ATTACHED FP65822/6 LANYARD, (1) FP1002 EQUIPMENT BAG	L OR XL*	6 FT (1.83 M)
FPKIT02/4	BASIC KIT INCL: (1) FP4001D HARNESS WITH FP65822/4 LANYARD, (1) FP1002 EQUIPMENT BAG	L OR XL*	4 FT (1.22 M)
FPKIT02/6	BASIC KIT INCL: (1) FP4001D HARNESS WITH FP65822/6 LANYARD, (1) FP1002 EQUIPMENT BAG	L OR XL*	6 FT (1.83 M)
FPKIT08/6	HIGH END KIT INCL: (1) FP1001EDG HARNESS WITH (1) FP64311/6 LANYARD, (1) FP1004 EQUIPMENT BAG	L OR XL*	6 FT (1.83 M)



FPCKIT01/6

FPKIT02/6



FPKIT08/6

B-Compliant Roofer's Kits

"B-COMPLIANT" BASIC ROOFER'S KITS IN STORAGE BUCKET

PART NO.	DESCRIPTION	SIZE OF HARNESS	LENGTH OF ROPE
FRPK099/25	ROOFER'S KIT INCL: (1) FP58EPS25 LIFELINE, (1) HARNESS #FP4001D383 WITH 30" LANYARD AND ROPE GRAB, ALL PERMANENTLY ATTACHED, (1) DISPOSABLE ROOF ANCHOR #FP09D WITH NAILS, (1) SMALL STORAGE BUCKET	L OR XL*	25 FT (7.6 M)
FRPK099/50	ROOFER'S KIT INCL: (1) FP58EPS50 LIFELINE, (1) HARNESS #FP4001D383 WITH 30" LANYARD AND ROPE GRAB, ALL PERMANENTLY ATTACHED, (1) DISPOSABLE ROOF ANCHOR #FP09D WITH NAILS, (1) SMALL STORAGE BUCKET	L OR XL*	50 FT (15 M)



FRPK099/25

* Please specify harness size when ordering.

Note: All items included in our kits are certified CSA except for roof anchor FP09D and FP09R as there is no certification program for these items.

FALL PROTECTION



FPRK099/25B



PART NO.	DESCRIPTION	SIZE OF HARNESS	LENGTH OF ROPE
FPRK099/25B	ROOFER'S KIT INCL: (1) FP58EPS25 LIFELINE, (1) FP4001D HARNESS, (1) 30 IN LANYARD #FP64311/2.5, (1) ROPE GRAB #FP141L, (2) DISPOSABLE ROOF ANCHOR #FP09D WITH NAILS, (1) STORAGE BUCKET	L OR XL*	25 FT (7.6 M)
FPRK099/50B	ROOFER'S KIT INCL: (1) FP58EPS50 LIFELINE, (1) FP4001D HARNESS, (1) 30 IN LANYARD #FP64311/2.5, (1) ROPE GRAB #FP141L, (2) DISPOSABLE ROOF ANCHOR #FP09D WITH NAILS, (1) STORAGE BUCKET	L OR XL*	50 FT (15 M)

FPRK099DPL/25



PART NO.	DESCRIPTION	SIZE OF HARNESS	LENGTH OF ROPE
FPRK099DPL/25	ROOFER'S KIT INCL: (1) FP58EPS25 LIFELINE, (1) FP4001DG HARNESS, (1) ROPE GRAB #FP142/2 WITH 2 FT "DYNA-PAK" ENERGY ABSORBING LANYARD, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS (1) STORAGE BUCKET	L OR XL*	25 FT (7.6 M)
FPRK099DPL/50	ROOFER'S KIT INCL: (1) FP58EPS50 ECONO LIFELINE, (1) FP4001DG HARNESS, (1) ROPE GRAB #FP142/2 WITH 2 FT "DYNA-PAK" ENERGY ABSORBING LANYARD, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS (1) STORAGE BUCKET	L OR XL*	50 FT (15 M)

"B-COMPLIANT" DELUXE ROOFER'S KITS IN STORAGE BUCKET

FPRK099/25DLX



PART NO.	DESCRIPTION	SIZE OF HARNESS	LENGTH OF ROPE
FPRK099/25DLX	ROOFER'S KIT INCL: (1) FP58EPS25 LIFELINE, (1) FP4001D HARNESS, (1) ROPE GRAB #FP142L/2 WITH 2 FT LANYARD AND DYNA-PAK ENERGY ABSORBER, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS (1) STORAGE BUCKET	L OR XL*	25 FT (7.6 M)
FPRK099/50DLX	ROOFER'S KIT INCL: (1) FP58EPS50 LIFELINE, (1) FP4001D HARNESS, (1) ROPE GRAB #FP142L/2 WITH 2 FT LANYARD AND DYNA-PAK ENERGY ABSORBER, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS (1) STORAGE BUCKET	L OR XL*	50 FT (15 M)

* Please specify harness size when ordering.

Note: All items included in our kits are certified CSA except for roof anchor FP09D and FP09R as there is no certification program for these items.



FPRK099E

"B-COMPLIANT" ECONO ROOFER'S KITS IN STORAGE BUCKET

PART NO.	DESCRIPTION	SIZE OF HARNESS	LENGTH OF ROPE
FPRK099E/25	ROOFER'S KIT INCL: (1) FP16EPS25 ECONO LIFELINE, (1) FP4001D HARNESS, (1) ROPE GRAB #FP132L/2.5 WITH 2.5 FT "DYNA-PAK" ENERGY ABSORBING LANYARD, (1) DISPOSABLE ROOF ANCHOR #FP09D WITH NAILS (1) STORAGE BUCKET	L OR XL*	25 FT (7.6 M)
FPRK099E/50	ROOFER'S KIT INCL: (1) FP16EPS50 ECONO LIFELINE, (1) FP4001D HARNESS, (1) ROPE GRAB #FP132L/2.5 WITH 2.5 FT "DYNA-PAK" ENERGY ABSORBING LANYARD, (1) DISPOSABLE ROOF ANCHOR #FP09D WITH NAILS (1) STORAGE BUCKET	L OR XL*	50 FT (15 M)




FPRK099ER

PART NO.	DESCRIPTION	SIZE OF HARNESS	LENGTH OF ROPE
FPRK099ER/25	ROOFER'S KIT INCL: (1) FP16EPS25 ECONO LIFELINE, (1) FP4001D HARNESS, (1) ROPE GRAB #FP132L/2.5 WITH 2.5 FT "DYNA-PAK" ENERGY ABSORBING LANYARD, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS (1) STORAGE BUCKET	L OR XL*	25 FT (7.6 M)
FPRK099ER/50	ROOFER'S KIT INCL: (1) FP16EPS50 ECONO LIFELINE, (1) FP4001D HARNESS, (1) ROPE GRAB #FP132L/2.5 WITH 2.5 FT "DYNA-PAK" ENERGY ABSORBING LANYARD, (1) REUSABLE ROOF ANCHOR #FP09R WITH SCREWS (1) STORAGE BUCKET	L OR XL*	50 FT (15 M)

* Please specify harness size when ordering.

Note: All items included in our kits are certified CSA except for roof anchor FP09D and FP09R as there is no certification program for these items.

4 Persons Temporary Rope Horizontal Lifeline

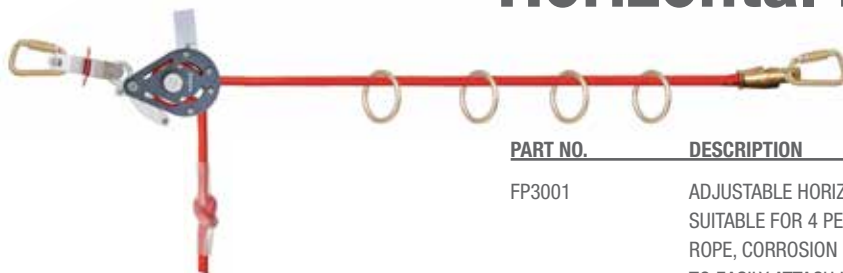

PART NO.	DESCRIPTION
FP3001	ADJUSTABLE HORIZONTAL LIFELINE THAT SPANS 5M (16FT) TO 25M (82FT), SUITABLE FOR 4 PERSONS. INCLUDES 16MM (5/8") DIAMETER KERNMANTLE ROPE, CORROSION RESISTANT TENSIONER, 4 STEEL O RINGS FOR THE USER TO EASILY ATTACH HIS LANYARD TO AND CARABINER END CONNECTIONS

Plastic inspection Tag for Safety Equipment

Durable tag with security locking device, galvanize steel shackle, plastic body with writable area for personal information, unique serial number to keep tracking on the product, offer in choice of 5 colors.

PART NO.	COLOR	QTY PER PACK
FPTAGR	RED	25
FPTAGB	BLUE	25
FPTAGY	YELLOW	25
FPTAGG	GREEN	25
FPTAGO	ORANGE	25



FPTAGR



FPTOOLTETHER



FP3731-5



FP1002



FP1004



FP1005



FP1006



FP1007

Accessories

PART NO.	DESCRIPTION
FPTOOLTETHER	TOOL TETHER WITH CARABINER
FP3731-5	TEMPORARY REMOVABLE TIE DOWN ANCHORS FOR TOOLS AND ACCESSORIES. NOT RATED FOR FALL PROTECTION. 1/2" DIAMETER ANCHOR RATED FOR 10KN (2400LBS)

Storage bags

STORAGE BAGS FOR VARIOUS EQUIPMENT

PART NO.	DESCRIPTION
FP1002	SMALL MESH EQUIPMENT BAG FOR A HARNESS AND LANYARD COMBO KIT - 14L X 13.5H IN
FP1004	SMALL EQUIPMENT BAG FOR BASIC EQUIPMENT KIT - 11.25L X 11.375H IN
FP1005	SMALL EQUIPMENT BAG FOR SELF RETRACTING LIFELINE OR WINCH 16L X 16.5W X 9H IN
FP1006	LARGE EQUIPMENT BAG FOR HARNESS, LANYARD, ANCHORAGE CONNECTORS AND MORE 23.5L X 11.75W X 12.5H IN


STORAGE BAGS FOR TRIPODS

PART NO.	DESCRIPTION
FP1007	DURABLE ZIPPERED TRIPOD BAG. TO PROTECT YOUR TRIPOD FROM DAMAGE AND DIRT WHILE REDUCING CARRYING EFFORT FOR FP09907 TRIPOD - 58.5 X 10.625 X 12.5 IN
FP1008	DURABLE ZIPPERED TRIPOD BAG. TO PROTECT YOUR TRIPOD FROM DAMAGE AND DIRT WHILE REDUCING CARRYING EFFORT FOR FP09910 TRIPOD - 96.5 X 12 X 12.75 IN




FALL CLEARANCE CALCULATION

① Worker's D-ring is above anchorage

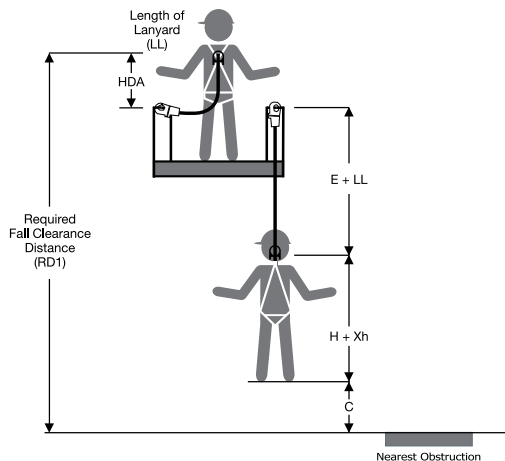

② Worker's D-ring is below anchorage

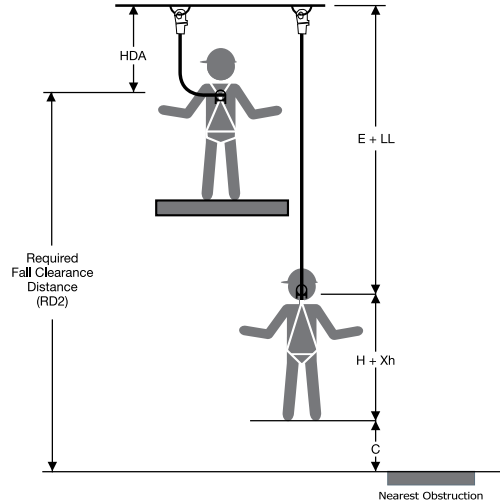

① $RD1 = LL + E + HDA + H + Xh + C + P$

LL	=	Lanyard Length
HDA	=	Vertical distance from D-ring to the anchorage system at the end of the lanyard.
RD	=	Required Distance for your fall arrest system.
E	=	Elongation or deceleration distance - This is the elongation of the deceleration device when it's deployed.
H	=	D-ring Height - This is the distance from the worker's feet to the harness dorsal D-ring.
C	=	Extra Clearance or safety factor.
Xh	=	System material stretch and D-ring movement
P	=	Position of the body ie. standing, crouching or laying down.

② $RD2 = LL + E - HDA + H + Xh + C + P$

Commonly used values:

E – E4 Energy Absorber = 3.9 ft
E6 Energy Absorber = 5.7 ft
WSRL = 3.5 ft

P – Standing = 0 ft
Crouching = 3ft
laying down = 5f

H – D-Ring height estimated to be 5 ft.

Xh – Material system stretch and D-ring movement estimated to be 1 ft.

C – Safety factor recommendation of 2 ft minimum.

Your formula can now be approximated as:

① $RD1 = LL + E + HDA + P + 8$

② $RD2 = LL + E - HDA + P + 8$

Example:


If you connect a 6ft E4 energy absorbing lanyard to an anchorage 2 ft above your back D-Ring while standing, you need a clearance of: $RD2 = 6 + 3.9 - 2 + 0 + 8 = 15.9$ ft.

If you connect a 6ft E4 energy absorbing lanyard to an anchorage 2 ft below your back D-Ring while standing, you need a clearance of: $RD1 = 6 + 3.9 + 2 + 0 + 8 = 19.9$ ft.

SEE OUR OTHER SAFETY PRODUCTS



Head Protection



Eye and Face Protection



Hearing Protection



Respiratory Protection



Fall Protection



First Aid Products



Traffic and High Visibility Products



Welding Products



CANADA

DSI Safety Inc. / Sécurité DSI Inc.

2477, Michelin Street, Laval, Qc, H7L 5B9

T. (450) 687-7374 • F. (450) 687-2243

www.dsisafety.com

USA

Dynamic Safety USA, LLC

400 Apgar Drive, Suite H, Somerset, NJ 08873

T: +1-844-378-7200 • F: +1-732-909-2233

www.dynamicsafetyusa.com

EUROPE

Dynamic Safety Europe B.V.

Anodeweg 52 4338RA Middelburg, The Netherlands

T+31 (0) 118 745760 • F+31 (0) 118 745769

www.dynamicsafety.eu

